

Pharmaceutical refrigerator

PHA 400

+2...+10°C.



Standard equipment:

- ✓ RAL 9016 coated exterior
- ✓ Energy-saving inverter compressor
- ✓ 50 mm insulation
- ✓ Reduced noise level
- ✓ Ecological refrigerant
- ✓ Mechanical door lock
- ✓ Self-closing door
- ✓ Left or right door
- ✓ Electronic controller with digital display allowing to change the temperature setting every 0.1°C
- ✓ Open door alarm
- ✓ Glass door in a PVC frame with a replaceable seal
- ✓ High and low temperature visual and sound alarm
- ✓ Broken temperature sensor alarm
- ✓ Defrost time exceeded alarm
- ✓ Automatic defrost and evaporation of condensate
- ✓ Metal coated shelves
- ✓ Acces port
- ✓ 4 levelling legs
- ✓ LED lighting
- ✓ 2 additional chcek holes in the back wall
- ✓ Application for mobile devices: information about the device status, historical and current alarms, quick preview of the recorded data with temperature charts; Bluetooth

Optional equipment:

- ✓ Alarm backup battery
- ✓ Power failure alarm
- ✓ Temperature recorder
- ✓ Change of standard temperature range
- ✓ Additional access ports
- ✓ Perforated shelves
- ✓ Castors with brake
- ✓ Drawers with dividers
- ✓ Additional shelves

PHA 400



Environmentally friendly refrigerant



3 access ports



LED lighting




Uniform temperature



Low energy consumption



Automatic defrost

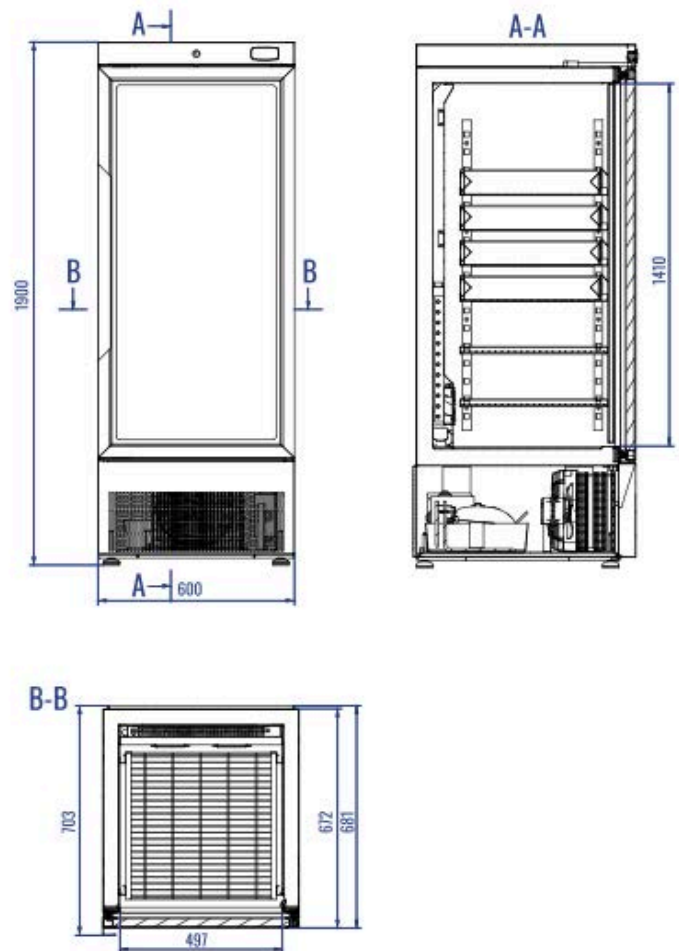

Technical specifications:

	Width	Depth	Height
External dimensions [mm]	600	703	1900
Cooling unit type	Inverter		
Gross capacity	400 [liters]		
Net capacity	300 [liters]		
Weight	120 [kg]		
Number of shelves	3		
Number of guides / horizontal supports	8		
Max. shelf load	30 [kg]		
Temperature range	+2...+10 [°C]		
Ambient conditions	+25 °C at 60% HR		
Refrigerant	R600a		
Power	230/50 [V/Hz]		
Number of doors	1		
Daily energy consumption	2 [kWh/24h]		
Noise level	50 [db]		
Power rating	265 [W]		
Rated current	1.1 [A]		